


JH-A32C(JH-W6)

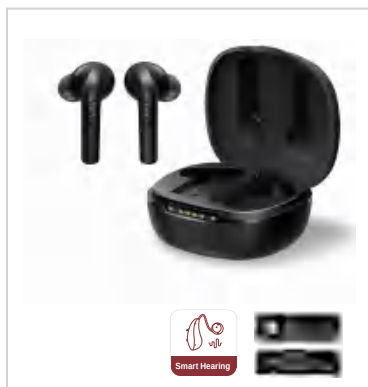


Product Features


- 1. 5.0 Bluetooth function, faster and more stable connection;
- 2. Fully customizable for personalized hearing;
-Smartphone APP(iOS/Android);
-Smart control to adjust the volume/EQ/MPO/modes etc;
- 3. Binaural Bluetooth connection for calling and streaming;
- 4. 4 channels Digital signal processing and 12 bands equalizer with noise reduction /WDRC /AFC;
- 5. Dual Microphones;
- 6. Lithium Rechargeable;
- 7. JH Quick-charge Technology.

Technical Data	IEC 60118-7:2005 Test Data (2cc-coupler)	ANSI S3.22-2003 Test Data (2cc-coupler)
Operating Voltage	DC 3.0V ~ 4.25V	DC 3.0V ~ 4.25V
Acoustic Gain (50 dB SPL)		
HFA	23.9dB	25dB
1600Hz	25dB	25dB
Peak Value	30.8dB	N/A
Max. output		
HFA	107dB	106dB
1600Hz	106dB	106dB
Peak Value	110.2dB	110dB
Reference Test Gain	28.5dB	N/A
Induction Coil Sensitivity		
Frequency Range	200 ~ 5700Hz	200-5400/Hz
Total Harmonic Distortion (500/800/1600Hz)	0.2%/0.4%/0.2%	0.2%/0.5%/0.3%
Equivalent Input Noise	22dB	23dB
Battery Current	1mA	1mA
Battery Type	Lithium battery	Lithium battery
Working Time	13H*5 with charging base	13H*5 with charging base

FITTING RANGE

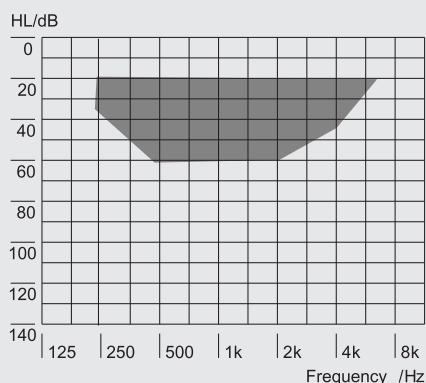

1. Microphone 1
2. Volume Adjustment/Hearing Mode Change
3. Microphone 2
4. Ear Dome
5. Charging Contacts
6. In Ear Detection Sensor

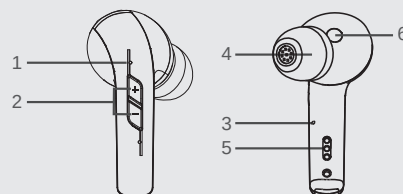

JH-A32C(JH-W6)

Accessories



Ear Dome(L)



Ear Dome(M)



Ear Dome(S)




Micro USB Cable




Cleaning Tool

All Curves are measured with fonix 8000 hearing aid test system, 2cc-coupler, IEC 60118-7. All sound pressure levels are referred to 20μPa (OSPL90 Output/FOG50 Gain/Reference Test Gain(RTG))


OSPL₉₀ Output



FOG₅₀ Gain



Reference Test Gain (RTG)



WARNING! Choking hazard posed by small parts.
Infants, small children and persons of mental incapacity
must not wear the hearing instrument
without appropriate supervision.