

JH-D36-4FA





Product feature

- 1. Clear and rich sound ,4 channels Digital signal processing with noise reduction /WDRC /AFC
- 2. 12 Bands Equalizer
- 3. Removable ear tube
- 4. 4 Different Hearing Profiles (programs)
- 5. Dual Microphones
- 6. Light weight . No Burden To Wear All Day
—Smaller Volume, Total Weight ≈ 1.9G
- 7. Knowles Microphone

Technical Data	IEC 60118-7:2005 Test Data (2cc-coupler)	ANSI S3.22-2003 Test Data (2cc-coupler)
Operating Voltage	DC1.0V~1.45V	DC1.0V~1.45V
Acoustic Gain (50 dB SPL)		
HFA	28.9dB	25.6dB
1600Hz	29dB	30dB
Peak Value	39.6dB	N/A
Max. output		
HFA	112.5dB	113.3dB
1600Hz	111.0dB	114dB
Peak Value	119.9dB	120.0dB
Reference Test Gain	35.5dB	36.1dB
Induction Coil Sensitivity	/	/
Frequency Range	219Hz-5719Hz	234Hz-5265Hz
Total Harmonic Distortion (500/800/1600Hz)	0.4%/0.4%/0.1%	1.1%/0.6%/0.1%
Equivalent Input Noise	23.4dB	25.2dB
Battery Current	/	/
Battery Type	Zinc-air battery	Zinc-air battery
Working Time	200H	200H

FITTING RANGE

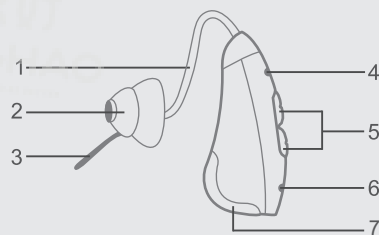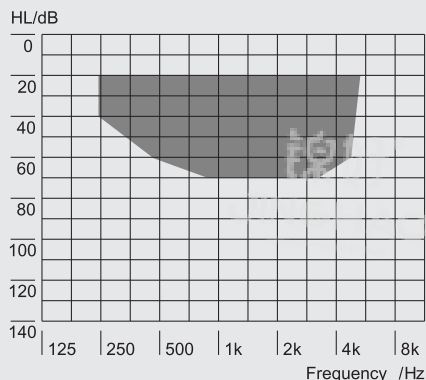

1. Ear Tube
2. Ear Dome
3. Stabilization Bar
4. Microphone 1
5. Volume Control
6. Microphone 2
7. Battery Door(ON/OFF)

JH-D36-4FA

Accessories



Ear Dome(L)



Ear Dome(M)



Ear Dome(S)




Zinc-air Battery




Cleaning tool

All Curves are measured with fonix 8000 hearing aid test system, 2cc-coupler ,IEC 60118-7.All sound pressure levels are referred to 20μPa (OSPL90 Output/FOG50 Gain/Reference Test Gain(RTG))


OSPL₉₀ Output



FOG₅₀ Gain



Reference Test Gain (RTG)



WARNING! Choking hazard posed by small parts. Infants, small children and persons of mental incapacity must not wear the hearing instrument without appropriate supervision.