

JH-907





Product feature

- 1. ITE hearing aid
- 2. Easy operation
- 3. Single ear use, suitable for left or right ear
- 4. Classic analog style
- 5. Crystal clear sound

Technical Data	IEC 60118-7:2005 Test Data (2cc-coupler)	ANSI S3.22-2003 Test Data (2cc-coupler)
Operating Voltage	DC 1.0V~1.45V	DC 1.0V~1.45V
Acoustic Gain (50 dB SPL)		
HFA	28.4dB	29dB
1600Hz	28dB	30dB
Peak Value	35.3dB	/
Max. output		
HFA	114.3dB	114.4dB
1600Hz	122dB	121dB
Peak Value	123.7dB	123.7dB
Reference Test Gain	28.6dB	28.6dB
Induction Coil Sensitivity	/	/
Frequency Range	200Hz-5512Hz	200Hz-5520Hz
Total Harmonic Distortion(500/800/1600Hz)	6%/20.2%/0.1%	6.6%/21.2%/0.1%
Equivalent Input Noise	42.4dB	42.2dB
Battery Current	2.3mA	2.3mA
Battery Type	Zinc-air battery	Zinc-air battery
Working Time	30h(Rayovac)	30h(Rayovac)

FITTING RANGE

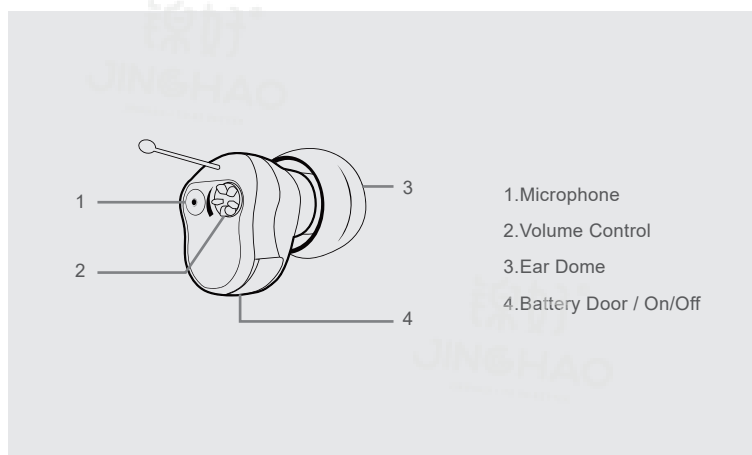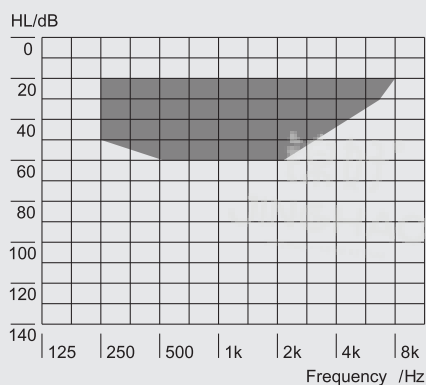

JH-907

Accessories



Ear Dome(L)




Ear Dome(M)



Ear Dome(S)




Volume Control Tool




Cleaning tools

All Curves are measured with fonix 8000 hearing aid test system, 2ccm-coupler ,IEC 60118-7.All sound pressure levels are referred to 20μPa (OSPL90 Output/FOG50 Gain/Reference Test Gain(RTG))


OSPL₉₀ Output

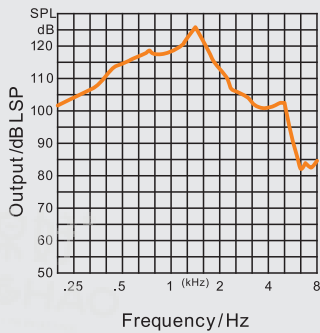

FOG50 Gain

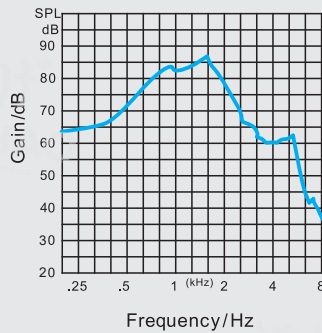

Reference Test Gain (RTG)



WARNING! Choking hazard posed by small parts. Infants, small children and persons of mental incapacity must not wear the hearing instrument without appropriate supervision.