

JH-A39





Product feature

- 1.Fashionable Style
-TWS design
- 2.Easy Operation
-Simple one-key operation for volume and power
- 3.Charge on-the-Go
-Portable charging case can recharge up to 3 times
-2.5 hour full charge technology
-10+ Hours of Use
- 4.Comfortable to wear

Technical Data	IEC 60118-7:2005 Test Data (2cc-coupler)	ANSI S3.22-2003 Test Data (2cc-coupler)
Operating Voltage	DC 3.0V ~ 4.25V	DC 3.0V ~ 4.25V
Acoustic Gain (50 dB SPL)		
HFA	27.1dB	27dB
1600Hz	31.9dB	35dB
Peak Value	31.9dB	/
Max. output		
HFA	107.8dB	107.8dB
1600Hz	110dB	110dB
Peak Value	110.6dB	111.5dB
Reference Test Gain	26.9dB	24.1dB
Induction Coil Sensitivity	/	/
Frequency Range	200 ~ 7302Hz	200 ~ 6387Hz
Total Harmonic Distortion(500/800/1600Hz)	1.1%/3.2%/0.2%	1.2%/5.6%/0.6%
Equivalent Input Noise	28dB	30dB
Battery Current	1.3mA	1.3mA
Battery Type	Lithium battery	Lithium battery
Working Time	10h*3 with charging base	10h*3 with charging base


FITTING RANGE

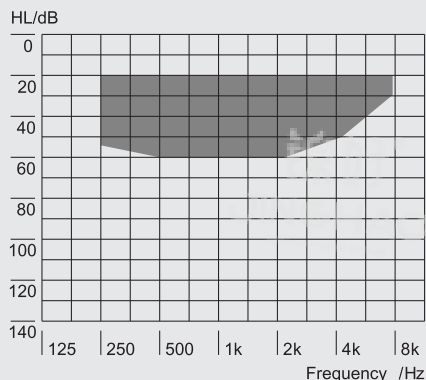

- 1. Volume Control / On/Off
- 2. Microphone
- 3. Ear Dome
- 4. Charging Contacts

JH-A39

Accessories



Ear Dome(L)



Ear Dome(M)



Ear Dome(S)




Micro USB Cable




Cleaning tools

All Curves are measured with fonix 8000 hearing aid test system, 2ccm-coupler ,IEC 60118-7.All sound pressure levels are referred to 20μPa (OSPL90 Output/FOG50 Gain/Reference Test Gain(RTG))


OSPL₉₀ Output



FOG₅₀ Gain



Reference Test Gain (RTG)



WARNING! Choking hazard posed by small parts.
Infants, small children and persons of mental incapacity
must not wear the hearing instrument
without appropriate supervision.