


# JH-A610


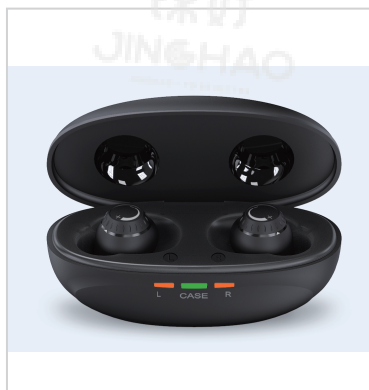


## Product feature

- 1. In ear detection turn on/off without squeal
- 2. Comfortable fit, perfected ergonomics, light weight with only 2.7g/per
- 3. VC adjustment, modify at ease, up to 190° turn on adjustment knob
- 4. NTC protection, automatically turn off when temperature reaches 45°C for safety
- 5. Quick 15-minute charge provides 3+hours hearing back.
- 6. Portable charging case can recharge each device at least 3 times

Technical Data	IEC 60118-7:2005 Test Data (2cc-coupler)	ANSI S3.22-2003 Test Data (2cc-coupler)
Operating Voltage	DC 3.0V~4.25V	DC 3.0V~4.25V
Acoustic Gain (50 dB SPL)		
HFA	27dB	28dB
1600Hz	26dB	26dB
Peak Value	32dB	N/A
Max. output		
HFA	107dB	109dB
1600Hz	107dB	108dB
Peak Value	110dB	111dB
Reference Test Gain	27dB	28dB
Induction Coil Sensitivity	/	/
Frequency Range	264~6719Hz	250~6418Hz
Total Harmonic Distortion(500/800/1600Hz)	0.2%/0.5%/0.3%	0.7%/0.4%/0.3%
Equivalent Input Noise	28.6dB	28.1dB
Battery Current	0.85mA	0.85mA
Battery Type	Lithium battery	Lithium battery
Working Time	16h*3 with charging base	16h*3 with charging base

## FITTING RANGE

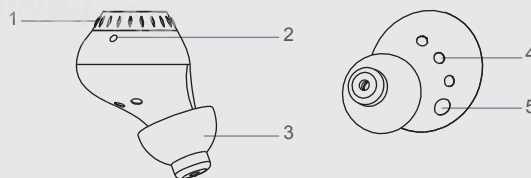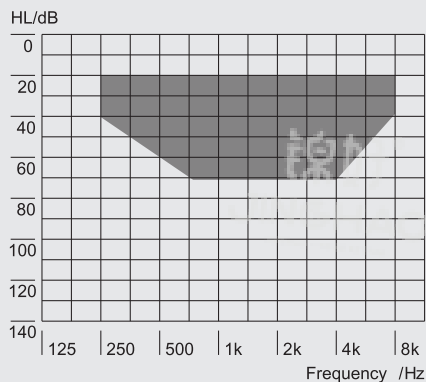

1. Volume Control
2. Microphone
3. Ear Dome
4. Charging Contacts
5. In Ear Detection Sensor

# JH-A610

## Accessories



Ear Dome(L)



Ear Dome(M)



Ear Dome(S)




Micro USB Cable




Cleaning tool

All Curves are measured with fonix 8000 hearing aid test system, 2cc-coupler ,IEC 60118-7.All sound pressure levels are referred to 20 $\mu$ Pa (OSPL90 Output/FOG50 Gain/Reference Test Gain(RTG))


### OSPL<sub>90</sub> Output



### FOG50 Gain



### Reference Test Gain (RTG)



**WARNING!** Choking hazard posed by small parts. Infants, small children and persons of mental incapacity must not wear the hearing instrument without appropriate supervision.