

JH-D26-00F





Product feature

- 1. Amplifies the volume of all sounds indoors and outdoors
- 2. Ergonomic fit behind the ear Extra-small design
- 3. 2 different Hearing Profiles (programmes)
- 4.Storage box with integrated powerbank
- 5.Portable charging case can recharge each device at least 3 times

Technical Data	IEC 60118-7:2005 Test Data (2cc-coupler)	ANSI S3.22-2003 Test Data (2cc-coupler)
Operating Voltage	DC1.0V~1.5V	DC1.0V~1.5V
Acoustic Gain (50 dB SPL)		
HFA	32.0dB	28.7dB
1600Hz	26dB	30dB
Peak Value	42.3dB	N/A
Max. output		
HFA	114.4dB	113.9dB
1600Hz	109.5dB	113.0dB
Peak Value	121.3dB	122.0dB
Reference Test Gain	31.7dB	29.0dB
Induction Coil Sensitivity	/	/
Frequency Range	209Hz-6592Hz	200Hz-7602Hz
Total Harmonic Distortion(500/800/1600Hz)	0.4%/0.2%/0.4%	0.8%/0.1%/0.1%
Equivalent Input Noise	29.9dB	
Battery Current	1.25mA	1.25mA
Battery Type	Lithium battery	Lithium battery
Working Time	12h*3 with charging base	12h*3 with charging base

FITTING RANGE

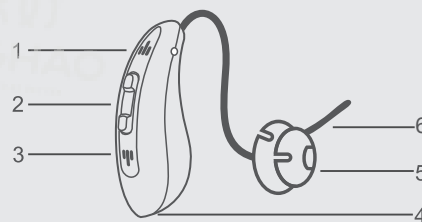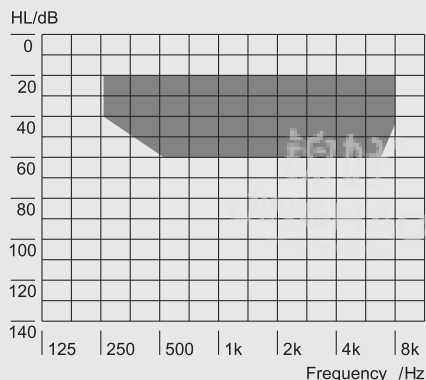

1. Microphone 1
2. Volume Control
3. Microphone 2
4. Charging Contacts
5. Ear Dome
6. Stabilization Bar

JH-D26-00F

Accessories




Ear Dome(L)



Ear Dome(M)




Ear Dome(S)




Cleaning tools

All Curves are measured with fonix 8000 hearing aid test system, 2cc-coupler ,IEC 60118-7.All sound pressure levels are referred to 20μPa (OSPL90 Output/FOG50 Gain/Reference Test Gain(RTG))


OSPL₉₀ Output

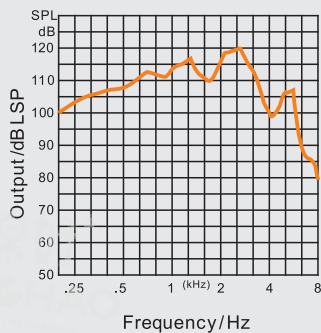

FOG₅₀ Gain

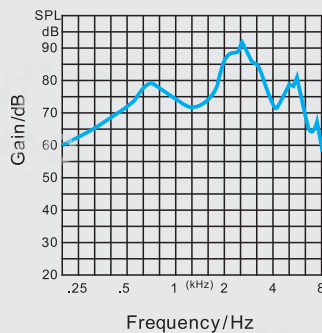

Reference Test Gain (RTG)

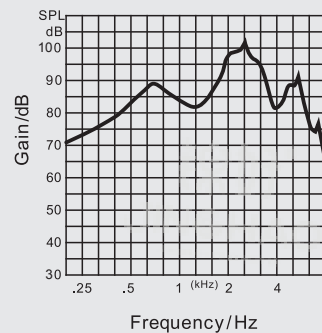

WARNING! Choking hazard posed by small parts.
Infants, small children and persons of mental incapacity
must not wear the hearing instrument
without appropriate supervision.

*The data sheet report is only responsible for the sample