

# JH-W3





## Product feature

- 1. Fully Customizable for Personal hearing
  - Smartphone APP (ios / android)
  - Smart control to adjust the volume/EQ/MPO/modes etc.
- 2. 2-in-1 multifunctional charging case
  - Mini Portable Charging Case & Anti-Bacterial UV lighting
- 3. Calls and Music auto switch
  - Binaural Bluetooth connection for calling and streaming
- 4. IP65 for Water resistance & Dust resistance
- 5. 5.0 Bluetooth function, faster and more stable connection
- 6. Receiver in the canal can give you more natural & rich sound and also less howling.
- 7. Portable charging case can recharge each device at least 3 times
- 8. Quick 15-minute charge provides 8+hours hearing back.

Technical Data	IEC 60118-7:2005 Test Data (2cc-coupler)	ANSI S3.22-2003 Test Data (2cc-coupler)
Operating Voltage	DC 3.0V~4.25V	DC 3.0V~4.25V
Acoustic Gain (50 dB SPL)		
HFA	33.0dB	27.5dB
1600Hz	34dB	32dB
Peak Value	36.0dB	/
Max. output		
HFA	112.8dB	113.7dB
1600Hz	112dB	113dB
Peak Value	114.2dB	115.2dB
Reference Test Gain	33.3dB	32.1dB
Induction Coil Sensitivity	/	/
Frequency Range	200Hz~5669Hz	200Hz~5679Hz
Total Harmonic Distortion(500/800/1600Hz)	0.2%/0.8%/0.2%	0.3%/0.4%/0.2%
Equivalent Input Noise	16.3dB	23.0dB
Battery Current	1.3mA	1.3mA
Battery Type	Lithium battery	Lithium battery
Working Time	24h*3 with charging base	24h*3 with charging base

## FITTING RANGE

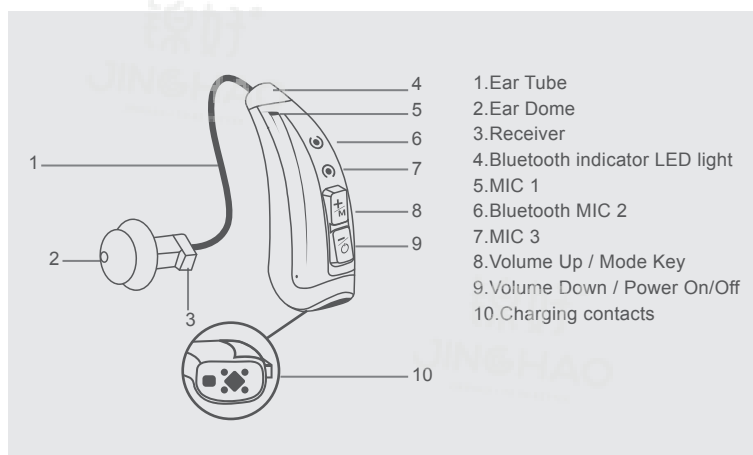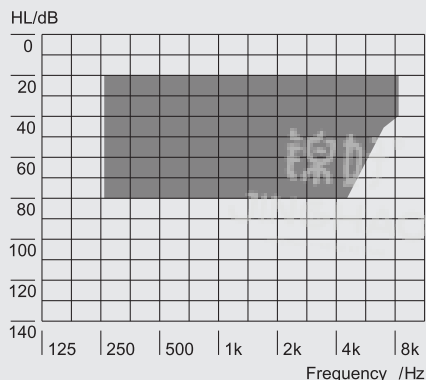

# JH-W3

## Accessories



Ear Dome(L)



Ear Dome(M)



Ear Dome(S)




Micro USB Cable




Cleaning tool

All Curves are measured with fonix 8000 hearing aid test system, 2ccm-coupler ,IEC 60118-7.All sound pressure levels are referred to 20 $\mu$ Pa (OSPL90 Output/FOG50 Gain/Reference Test Gain(RTG))


OSPL<sub>90</sub> Output



FOG<sub>50</sub> Gain



Reference Test Gain (RTG)



WARNING! Choking hazard posed by small parts.  
Infants, small children and persons of mental incapacity  
must not wear the hearing instrument  
without appropriate supervision.